


Precast Concrete

PRESTRESSED BEAMS

For Bridges

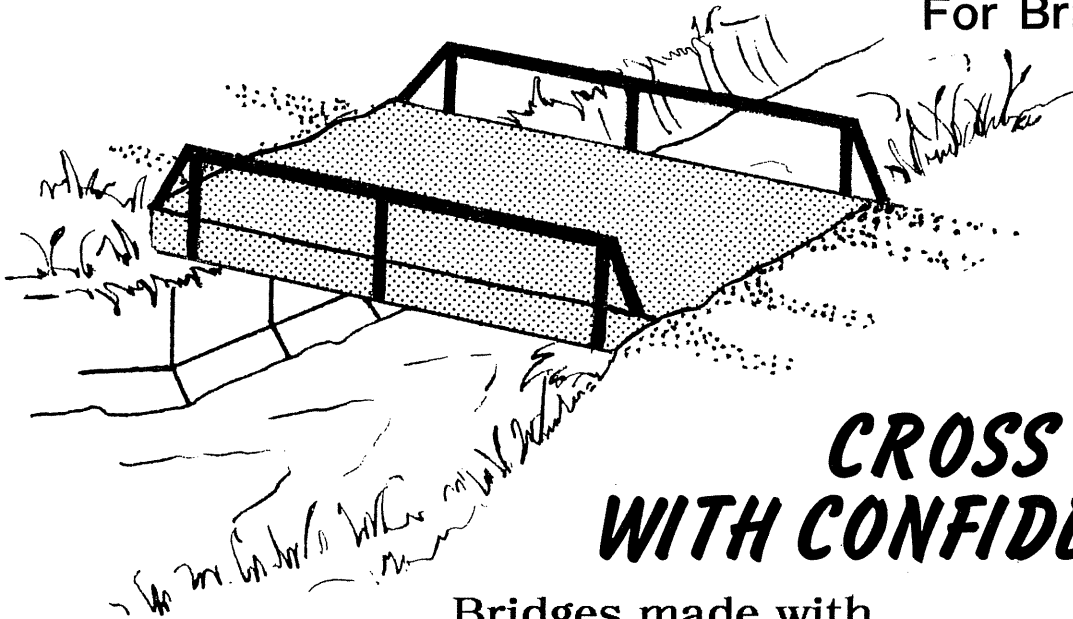


Also see
U Culvert sheet
for Bridge
Information

CROSS WITH CONFIDENCE

Bridges made with
Vaughn Concrete Products Prestressed Beams

18" x 18" Beam - made to order in the length you need
prestressed with 1/2" prestress strand for top strength
Maximum span, 26 ft. for H20 loading



Beams are bolted together with 7/8" threaded rod
which is placed through sleeve cast in beam

Add number of beams to make the width you need

The ease of handling and fast installation makes it
ideal for permanent or temporary locations

INSTALLATION:

Install your own, or have Vaughns install for you
Precast footing available
with Retaining Walls used for wing walls

18" Beam Weight:
326 lbs. per lin. ft.

Optional Steel pipe railings bolt to bridge

Actual dimensions of concrete products may vary slightly.

vaughn
concrete products, inc.

UPDATED 11/97

12650 Tucson Street • Henderson, Colorado 80640 • 303-659-3747, Fax 303-659-1333
2671 So. Greeley Hwy • Cheyenne, Wyoming 82007 • 307-634-0695, Fax 307-634-0694
10021 Amarillo Blvd. East • Amarillo, Texas 79107 • 806-374-3747, Fax 806-335-3717