


POLYLOK'S NEWLY DESIGNED PIPE SEAL.


*Eliminated grouting around the pipe.
Quick and easy conversion to any existing form.*

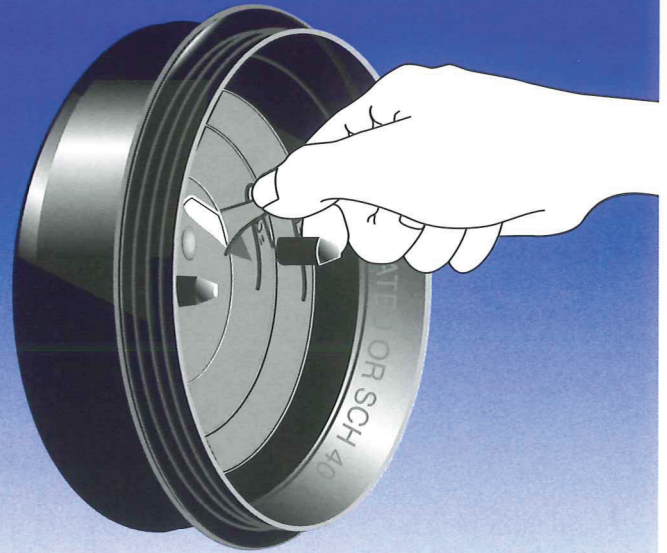

All Products are Patent Pending or covered under existing Patents.


POLYLOK'S

New low pressure pipe seal can be used in any low pressure application.

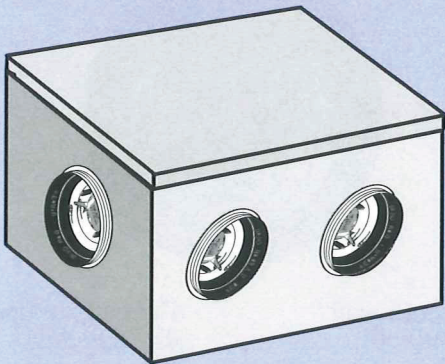

With our NEW TEAR OUTS we've made it... **FOOL PROOF**. Just tear out the size you need and slide your pipe into the seal.

- Septic Tanks
- Distribution Boxes
- Drainage Boxes

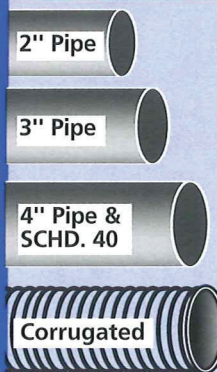

Accommodates
2", 3", 4",
SCHD. 40 &
corrugated pipes.

FOR ADDITIONAL INFORMATION ON ANY PRODUCT, OR PRINTED MATERIAL CALL OUR TOLL FREE NUMBER LISTED BELOW.

- EQUALIZERS • BAFFLE READY PIPE SEALS • EFFLUENT FILTERS • BAFFLES • GAS DEFECTORS • STAINLESS STEEL SCREW NAILS • DIPPER SETS • ADAPTER PLUGS • RAIN DRAIN GRATES • LIFT HOLE PLUGS • STEEL MOLD'S FOR: THE DIPPER BOX, D-BOX / RAIN DRAIN CUSTOM D-BOXES • STEEL CLAMPS, LARGE & SMALL • CUSTOM ENGRAVED SIGNS
- HANDLES: RECESSED HINGED OR STATIONARY • WARNING SIGNS • CUSTOM SIGNS • SAFETY CAPS FOR REBAR

All items are in stock and ready for same day shipment.



A Precaster Working For Precasters.

POLYLOK™ Inc

173 Church Street, Yalesville, CT 06492
1-877-POLYLOK Fax (203) 265-4941
(765-9565) 1-800-234-3119
E-Mail Address: sales@polylok.com
Web site: www.polylok.com



*Your Source
For Precast Concrete
& Septic Products!*

U.S. Patent # 4805,902
Canada Patent # 1,278,568
Other Patents Pending

Made in U.S.A.

POLYLOK'S PIPE SEALS



A LOW PRESSURE PIPE SEAL FOR SEPTIC TANKS, D-BOXES AND MORE.

ADVANTAGES OF USING POLYLOK SEALS:

- **RELIABLE**
Assures a fast, watertight connection...every time.
- **WATERTIGHT**
Prevents infiltration and exfiltration.
- **LABOR SAVING**
No grouting necessary for secure pipe connection.
- **ADAPTABLE**
Existing forms can be easily modified to accommodate Polylok.
- **COST EFFECTIVE**
The addition of low cost Polylok seals will reduce customer's labor costs and help increase your sales.
- **VERSATILITY**
One size Polylok seal fits all 2", 3", 4", and Sch#40 pipes, as well as 4" corrugated pipe.

Polylok Pipe Installation


1. Adaptor plug is cut to 1/8" less than the wall of the septic tank. Adaptor is then attached with a single 3/8" carriage bolt.

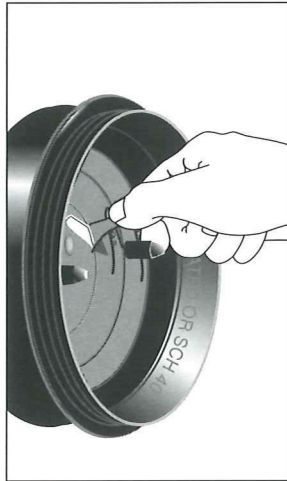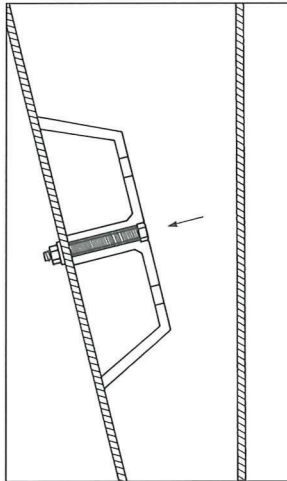

3. Once on job site, just tear out the size you need and slide your pipe into the seal.

2" Diameter pipe pullout



3" Diameter pullout

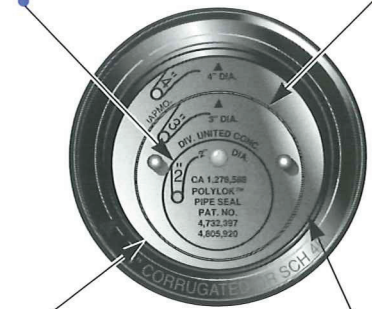

4" Smooth wall pipe pullout

4" corrugated pipe also schedule #40, pullout

2. Polylok snaps onto the adaptor and is held securely by two "friction fit" positioning posts. Form is then closed and is ready to pour and strip.

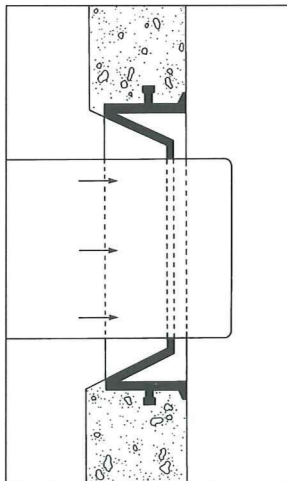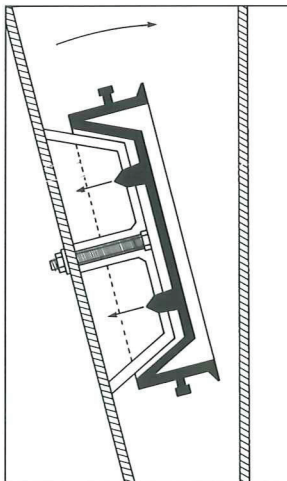

4. Pipe is then inserted into the Polylok. No leaks. No grout. It's that simple.

It's time to upgrade your product with the Polylok Pipe Seal...your customers will be glad you did. For more information on Polylok or any of our other products for the septic system call: 800-234-3119 EXT #20 & #29