


PRECAST CONCRETE CURB INLET

30" DIAMETER ACCESS

INLET BOX DETAIL

B-5, B-10, B-15 & B-20 INLETS PROVIDED WITH WINGS FOR B-25, ETC. WHERE SUITABLE (SEE DRAWING FOR WING DETAIL)
 MULTIPLE INLETS MAY BE PROVIDED WITH A SHORT "FEEDER" PIPE FOR CONNECTING INLETS TO PROVIDE LARGER INLET CAPACITY AS REQUIRED.
****CURB INLETS ARE ALSO AVAILABLE AS SPECIAL ORDER ITEMS WITH AN INSIDE WIDTH OF 3'-6"**

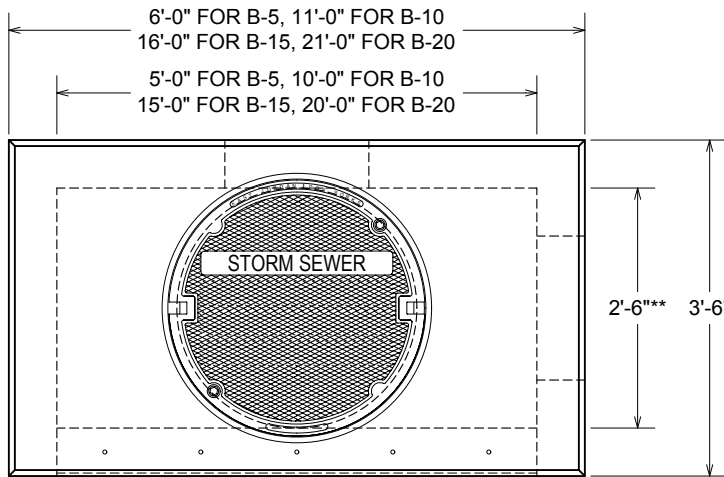

PLAN VIEW

- VCP ITEM #B-5 (30) CURB INLET
- VCP ITEM #B-10 (30) CURB INLET
- VCP ITEM #B-15 (30) CURB INLET
- VCP ITEM #B-20 (30) CURB INLET


CONTRACTOR TO PLACE FLOW INVERT AS REQUIRED

WEIGHTS:


- B-5 TOP: ~3,220 LBS.
- B-10 TOP: ~5,300 LBS.
- B-15 & B-20 JOINT LOCATIONS VARY AS REQ'D.
- BOX WEIGHTS VARY WITH SIZE & DEPTH

5"X5"X $\frac{3}{8}$ " ANGLE IRON CAST IN FRONT FACE OF TOP SECTION. ANGLE IRON ANCHORED INTO FACE OF TOP SECTION BY USING #4 L-SHAPED REBARS WITH ONE 6" & ONE 18" LEG. THE 6" LEG OF L BARS TO BE WELDED TO OPPOSITE LEGS OF ANGLE IRON @ 12" O.C., THE 18" LEG OF L BARS TO PROJECT INTO TOP SECTION

ENTIRE TOP PERIMETER EDGES OF TOP SECTION ARE CHAMFERED ON 2'-6" WIDE B-5 & B-10 INLETS, OTHERWISE PERIMETER IS ROUNDED WITH CONCRETE EDGER

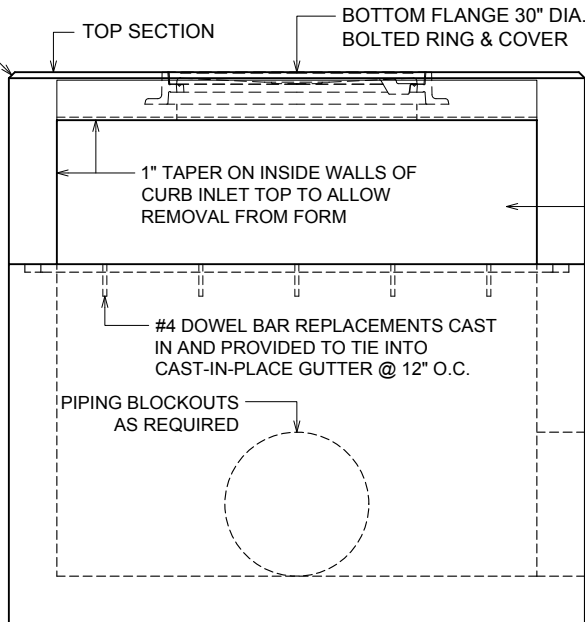

FRONT VIEW

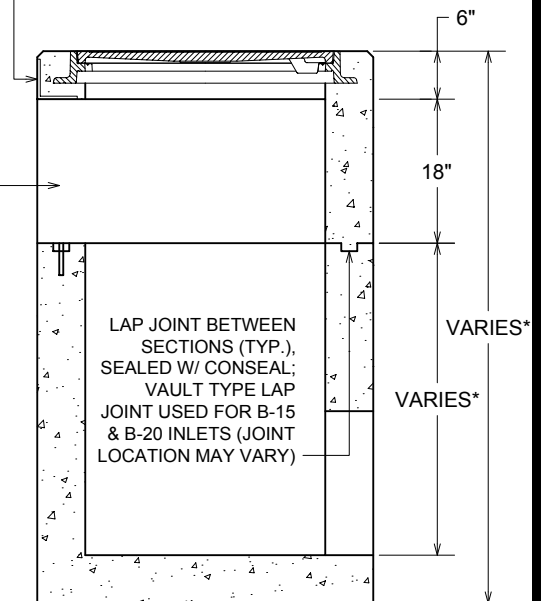

SECTION VIEW

BOTTOM SECTION

PIPING BLOCKOUTS FOR CONTRACTOR TO GROUT IN "FEEDER" PIPES IF WINGS ARE REQUIRED

NOTES:

- CONCRETE: 5,000 P.S.I. MINIMUM
- REINFORCING: GRADE 60 MINIMUM
- DESIGNED FOR AASHTO HS-20-44 LOADINGS
- ALL WALL THICKNESSES TO BE 6" (MINIMUM)
- *BOX DEPTH UP TO 4'-0" I.D.
- *INTERMEDIATE SECTION(S) AVAILABLE FOR INCREASED DEPTH

ACTUAL DIMENSIONS OF CONCRETE PRODUCTS MAY VARY SLIGHTLY



B-5 - B-20 30-INCH CURB INLET.DWG
 DATE CREATED: 10/10
 UPDATED: -----

12650 Tucson Street • Henderson, Colorado 80640 • 303-659-3747, Fax 303-659-1333
 2671 South Greeley Hwy • Cheyenne, Wyoming 82007 • 307-634-0695, Fax 307-634-0694
 10021 Amarillo Blvd East • Amarillo, Texas 79108 • 806-374-3747, Fax 806-335-3717

www.vaughnconcreteproducts.com