
PRECAST CONCRETE PICNIC TABLE

PER WYDOT SPECIFICATIONS

ASSEMBLED TABLE WEIGHS APPX. 2,400 LBS. SHEET 1 OF 4

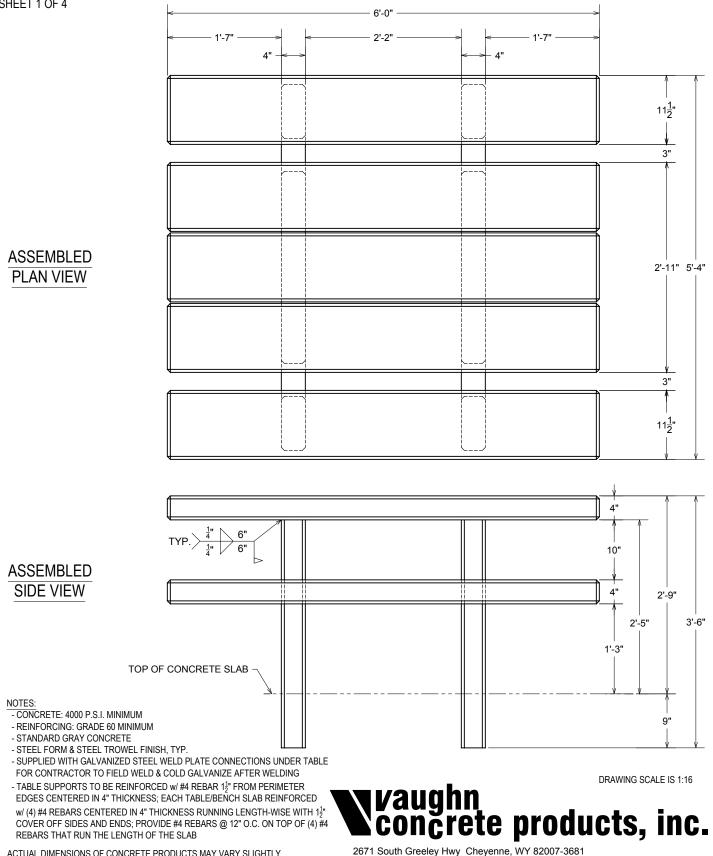

Toll Free (877) 827-8255 Toll Free Fax (877) 827-7363

(307) 634-0695 Fax (307) 634-0694


ACTUAL DIMENSIONS OF CONCRETE PRODUCTS MAY VARY SLIGHTLY

PICNIC TABLE - WYDOT.DWG DATE CREATED: 12/09 DATE MODIFIED: 5/13

PRECAST CONCRETE PICNIC TABLE

PER WYDOT SPECIFICATIONS

ASSEMBLED TABLE WEIGHS APPX. 2,400 LBS. SHEET 2 OF 4

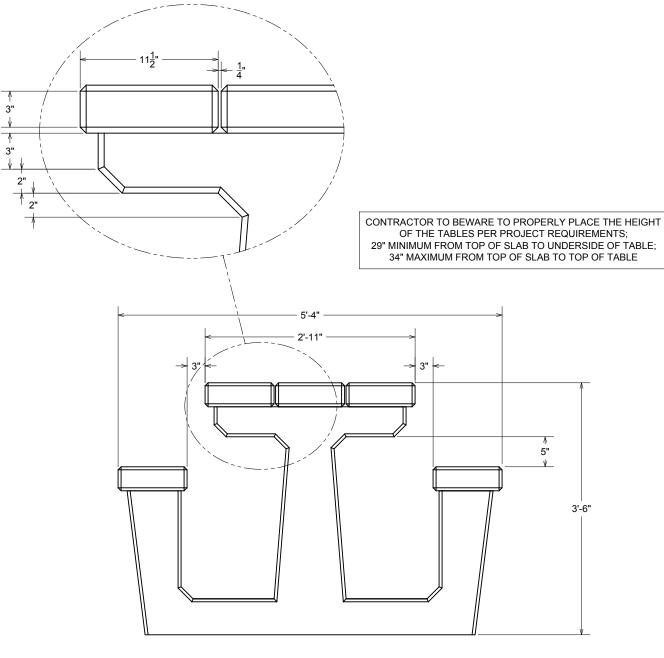

ASSEMBLED END VIEW

NOTES:

- CONCRETE: 4000 P.S.I. MINIMUM
- REINFORCING: GRADE 60 MINIMUM
- STANDARD GRAY CONCRETE
- STEEL FORM & STEEL TROWEL FINISH, TYP.
- SUPPLIED WITH GALVANIZED STEEL WELD PLATE CONNECTIONS UNDER TABLE FOR CONTRACTOR TO FIELD WELD & COLD GALVANIZE AFTER WELDING

- TABLE SUPPORTS TO BE REINFORCED w/ #4 REBAR 12" FROM PERIMETER EDGES CENTERED IN 4" THICKNESS; EACH TABLE/BENCH SLAB REINFORCED w/ (4) #4 REBARS CENTERED IN 4" THICKNESS RUNNING LENGTH-WISE WITH 12" COVER OFF SIDES AND ENDS; PROVIDE #4 REBARS @ 12" O.C. ON TOP OF (4) #4 REBARS THAT RUN THE LENGTH OF THE SLAB

ACTUAL DIMENSIONS OF CONCRETE PRODUCTS MAY VARY SLIGHTLY

PICNIC TABLE - WYDOT.DWG DATE CREATED: 12/09 DATE MODIFIED: 5/13




vaughn Concrete products, inc.

2671 South Greeley Hwy Cheyenne, WY 82007-3681 Toll Free (877) 827-8255 Toll Free Fax (877) 827-7363 (307) 634-0695 Fax (307) 634-0694

PRECAST CONCRETE PICNIC TABLE DETAIL OF PICNIC TABLE LEG 2 REQUIRED FOR EACH TABLE

SHEET 3 OF 4

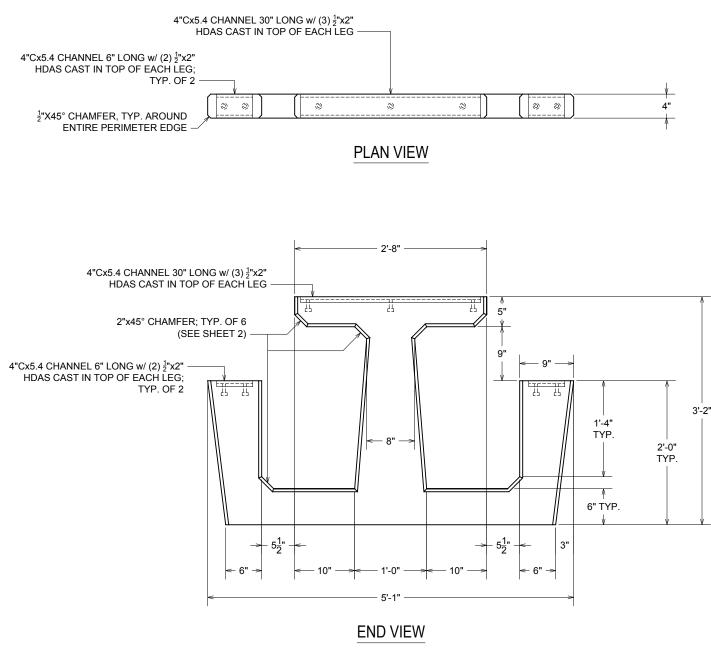

NOTES:

- CONCRETE: 4000 P.S.I. MINIMUM
- REINFORCING: GRADE 60 MINIMUM
- STANDARD GRAY CONCRETE
- STEEL FORM & STEEL TROWEL FINISH, TYP.
- SUPPLIED WITH GALVANIZED STEEL WELD PLATE CONNECTIONS UNDER TABLE FOR CONTRACTOR TO FIELD WELD & COLD GALVANIZE AFTER WELDING
- TABLE SUPPORTS TO BE REINFORCED w/ #4 REBAR 1¹/₂" FROM PERIMETER EDGES CENTERED IN 4" THICKNESS; EACH TABLE/BENCH SLAB REINFORCED w/ (4) #4 REBARS CENTERED IN 4" THICKNESS RUNNING LENGTH-WISE WITH 1¹/₂" COVER OFF SIDES AND ENDS; PROVIDE #4 REBARS @ 12" O.C. ON TOP OF (4) #4 REBARS THAT RUN THE LENGTH OF THE SLAB

ACTUAL DIMENSIONS OF CONCRETE PRODUCTS MAY VARY SLIGHTLY

PICNIC TABLE - WYDOT.DWG DATE CREATED: 12/ O9 DATE MODIFIED: 5/13 DRAWING SCALE IS 1:16




2671 South Greeley Hwy Cheyenne, WY 82007-3681 Toll Free (877) 827-8255 Toll Free Fax (877) 827-7363 (307) 634-0695 Fax (307) 634-0694


PRECAST CONCRETE PICNIC TABLE

DETAIL OF PICNIC TABLE BENCH & TABLE SLAB

5 REQUIRED FOR EACH TABLE

SHEET 4 OF 4

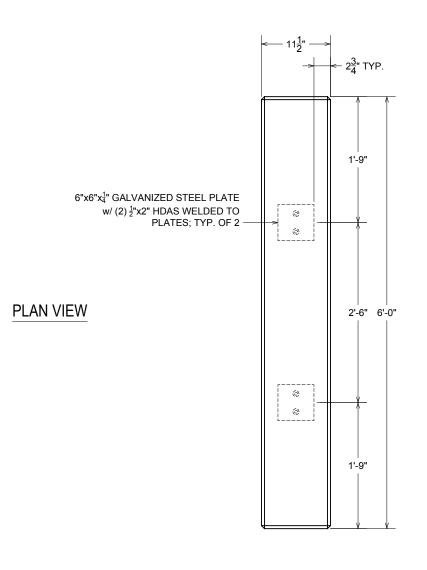



NOTES:

- CONCRETE: 4000 P.S.I. MINIMUM

- REINFORCING: GRADE 60 MINIMUM
- STANDARD GRAY CONCRETE
- STEEL FORM & STEEL TROWEL FINISH, TYP.
- SUPPLIED WITH GALVANIZED STEEL WELD PLATE CONNECTIONS UNDER TABLE FOR CONTRACTOR TO FIELD WELD & COLD GALVANIZE AFTER WELDING

- TABLE SUPPORTS TO BE REINFORCED w/ #4 REBAR 12^{III} FROM PERIMETER EDGES CENTERED IN 4" THICKNESS; EACH TABLE/BENCH SLAB REINFORCED w/ (4) #4 REBARS CENTERED IN 4" THICKNESS RUNNING LENGTH-WISE WITH 12^{III} COVER OFF SIDES AND ENDS; PROVIDE #4 REBARS @ 12^{III} O.C. ON TOP OF (4) #4 REBARS THAT RUN THE LENGTH OF THE SLAB

ACTUAL DIMENSIONS OF CONCRETE PRODUCTS MAY VARY SLIGHTLY

PICNIC TABLE - WYDOT.DWG DATE CREATED: 12/ O9 DATE MODIFIED: 5/13 DRAWING SCALE IS 1:16



2671 South Greeley Hwy Cheyenne, WY 82007-3681 Toll Free (877) 827-8255 Toll Free Fax (877) 827-7363 (307) 634-0695 Fax (307) 634-0694