


PRECAST CONCRETE


BASE WITH REMOVABLE BOLLARD

7½" DIAMETER X 7'-4" LONG

- **NO SECONDARY POUR REQUIRED!!!**
- **EXCELLENT FOR TEMPORARILY RESTRICTING VEHICULAR ACCESS TO DRIVEWAYS, PATHWAYS, ETC.**
- **GREAT FOR PROTECTING STORE FRONTS, GAS PUMPS, FENCING, GATES, SCHOOLS, TRANSFORMERS, SWITCH GEAR & UTILITIES OF ALL TYPES**
- **ROTO MOLDED POLYETHYLENE EXTERIOR SHELL FILLED WITH REINFORCED CONCRETE**
- **RED, BLUE, GRANITE LIGHT GRAY OR GRANITE DARK GRAY BOLLARDS ARE AVAILABLE AS SPECIAL ORDER ITEMS (MIN. ORDER OF 20 REQUIRED)**
- **CONTRACTOR FRIENDLY ~ EASY INSTALLATION**
- **IMPACT RESISTANT**
- **UV RESISTANT**
- **IF THE BOLLARD GETS DAMAGED...LIFT THE DAMAGED BOLLARD OUT & SLIDE A NEW BOLLARD IN!**

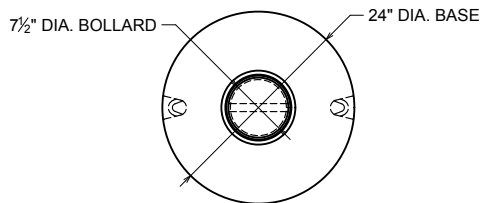

PLAN VIEW

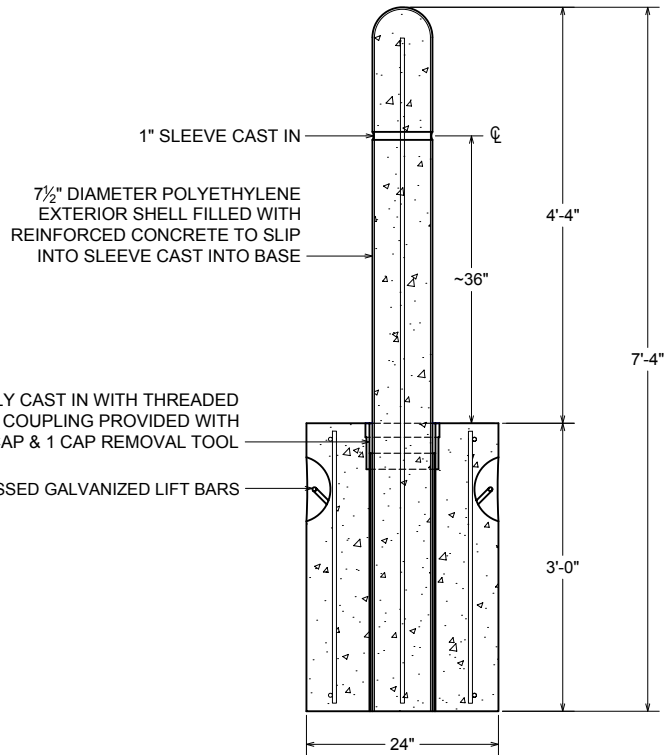

SECTION VIEW

WEIGHT:

- BOLLARD WITH BASE WEIGHS APPX. 1,635 LBS.
- BASE WEIGHS APPX. 1,300 LBS.
- REMOVABLE BOLLARD WEIGHS APPX. 335 LBS.

NOTES:

- CONCRETE: 4000 P.S.I. MINIMUM
- REINFORCING: GRADE 60 MINIMUM
- 7½" BOLLARD: (1) #4 VERTICAL REBAR
- 24" BASE: (2) #4 STIRRUPS, (4) #4 VERTICAL REBARS

ACTUAL DIMENSIONS OF CONCRETE PRODUCTS MAY VARY SLIGHTLY



DRAWING NOT TO SCALE

BASE WITH REMOVABLE BOLLARD.DWG
 DATE CREATED: 11/13
 UPDATED: -----

12650 Tucson Street • Henderson, Colorado 80640 • 303-659-3747, Fax 303-659-1333
 2671 South Greeley Hwy • Cheyenne, Wyoming 82007 • 307-634-0695, Fax 307-634-0694
 10021 Amarillo Blvd East • Amarillo, Texas 79108 • 806-374-3747, Fax 806-335-3717

www.vaughnconcreteproducts.com